


EN 60924  
230V 50/60 Hz

# UNIVERSALE



	A	BC	DE	F
KEN1-UNI	41	239	44	295 3 3
KEN 3-58	163	92	173	39 235 33

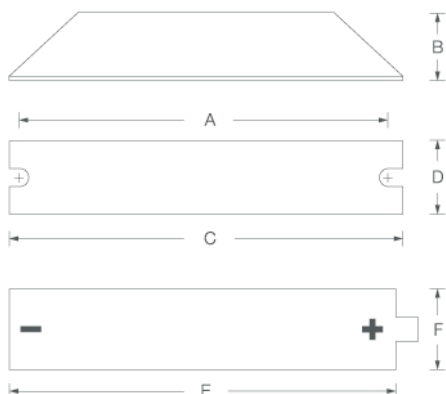

### Caratteristiche tecniche:

#### KEN1-UNI: per sistema intelligente

- autonomia 2 h: 18W
- autonomia 1,5 h: 36W
- autonomia 1 h: 58W

#### KEN3-58: standard

- autonomia 3 h: 58W

Ref.

1 LE KEN1-UNI 1-1,5-2 h 6,0 V · 4,0 Ah

1 LE KEN3-58 3 h 4,8 V · 4,0 Ah

	LAMPADA LAMP LAMPE	PLAMP (W/h)	LUMEN TEORICI THEORETICAL LUMEN OUTPUT THEORETISCHER LUMENWERT	BLF	FLUSSO LUMINOSO (lm) LUMEN OUTPUT (lm) LICHTSTROM (lm)
	<b>TC-DEL 18W</b>	18	1200	43%	510
	<b>TC-DEL 26W</b>	26	1800	34%	604
	<b>TC-TEL 18W</b>	18	1200	37%	445
	<b>TC-TEL 32W</b>	32	2400	24%	584
	<b>TC-TEL 42W</b>	42	3200	23%	733
	<b>T8-18W</b>	18	1350	39%	528
	<b>T8-36W</b>	36	3350	24%	806
	<b>T8-58W</b>	58	5200	18%	951
	<b>T5-HE 14W</b>	14	1350	41%	548
	<b>T5-HE 21W</b>	21	2100	39%	822
	<b>T5-HO 24W</b>	24	2000	32%	643
	<b>T5-HO 39W</b>	39	3500	26%	902
	<b>TC-L 18W</b>	18	1200	31%	367
	<b>TC-L 24W</b>	24	1800	34%	604
	<b>TC-L 36W</b>	36	2900	28%	810
	<b>TC-L 55W</b>	55	4800	19%	894
	<b>TC-F 18W</b>	18	1100	21%	230
	<b>TC-F 24W</b>	24	1700	19%	328
	<b>TC-F 36W</b>	36	2800	21%	596
	<b>TC-DD 21W</b>	21	1500	37%	550
	<b>TC-DD 28W</b>	28	2050	32%	665
	<b>FC-22W</b>	22	875	38%	332
	<b>FC-32W</b>	32	1550	34%	528
	<b>FC-40W</b>	40	2090	34%	709



Via Milanese, 11  
22070 VENIANO (CO) ITALIA  
Tel. +39 031 89441 - Fax +39 031 931848  
E-mail venditalia@perry.it  
www.perry.it