

Scheda tecnica

Tonda da parete



EN 60598-2-22
230V 50/60 Hz
IP 44 IK 09


Standard SE+SA Multiled / *Not mantained + Mantained multiled*

IP
44

	OTTICA	COM.	LUMEN	A	11111
1LE QPL200	area	-	205 lm	1 h	12 h

Diffusore	Trasparente
Luminosità	185 - 250 lm
Versioni	Standard Autotest Intelligente DAIL
Modalità operativa	SE SE+SA
Batteria	NiCd NiMh LiFePO4
Tempo di ricarica	12 h
IP	IP44 IP65
IK	09
Alimentazione	230V 50/60 Hz
Standard	EN IEC 60598-2-22 EN IEC 60598-1
Finiture	○ ●


Curva Isolux

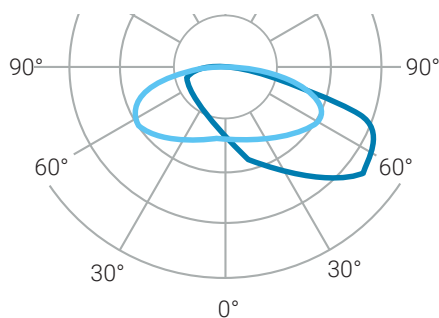

Dimensioni



Ø97



57